


OFF ROAD


C50F

EPSILON PALFINGER


DESIGNS THE DIFFERENCE

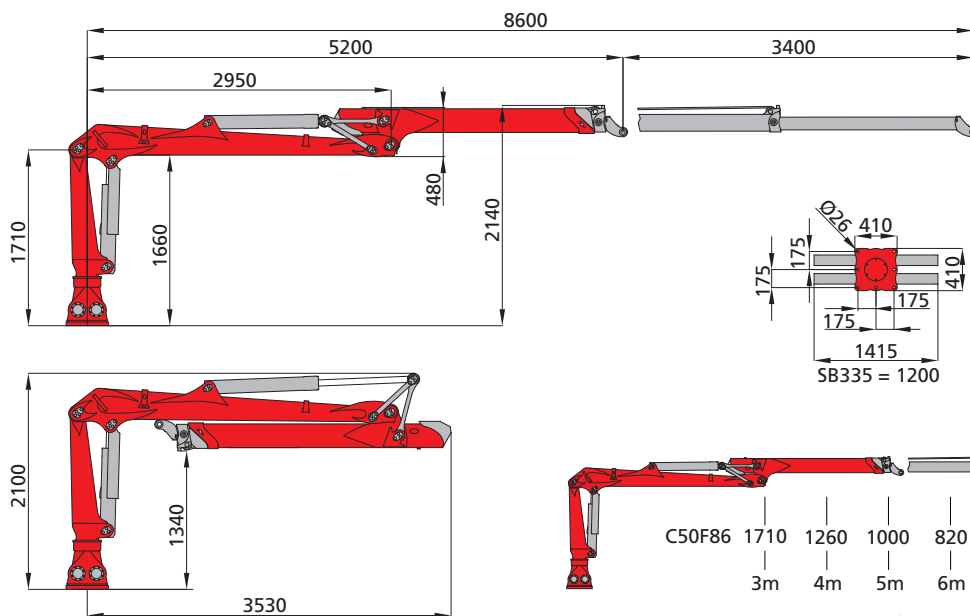

C50F

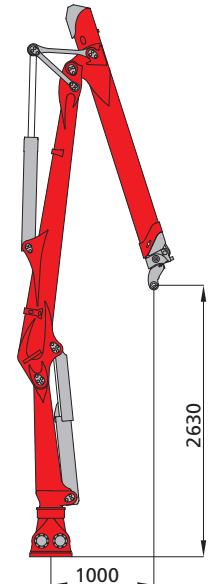

C50F86 1710 1260 1000 820 690 600 kg
3m 4m 5m 6m 7m 8m
lifted weight, net without accessories

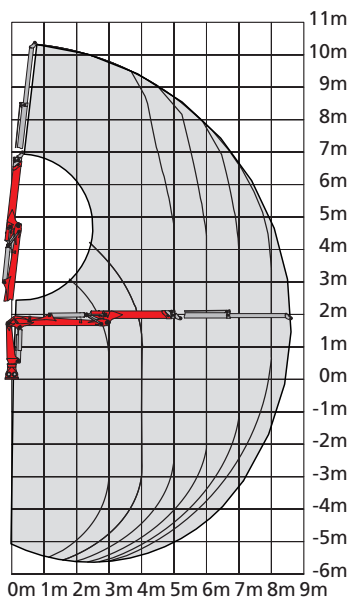

crane type		C50F86
lifting moment net	[kNm]	51
slewing torque net	[kNm]	17
slewing angle	[°]	425
max. outreach	[m]	8,6
operating pressure	[bar]	170
recommended pump capacity	1K [l/min]	1x80
	2K [l/min]	2x60
	1K LS [l/min]	1x120
dead weight without link / rotator	[kg]	1050

Standard equipment

Solid double rack slewing system with end stroke suppression, 425° slewing angle
Biological oil Panolin HLP Synth 46
Coating RAL 3020
Main cylinder protection guard
EPSCOPE Double telescopic boom system, all parts protected and mounted inside
EPSLINK Epsilon knuckle set with inlaid protected hoses and hose set between telescopic boom - rotator
Rotator Indexator GV6RF, incl. protection cover for hoses
Epsilon lights package: 2 Halogen spot lights mounted and completely wired on outer boom


Special equipment and accessories

LED 2 LED spot lights (instead of Halogen) on outer boom mounted and wired completely
SB335 slewing angle 335°
RAL special colour RAL
FG26 timber grab 0,26m²
FG36 timber grab 0,36m²


C50F




■ standard equipment □ optional

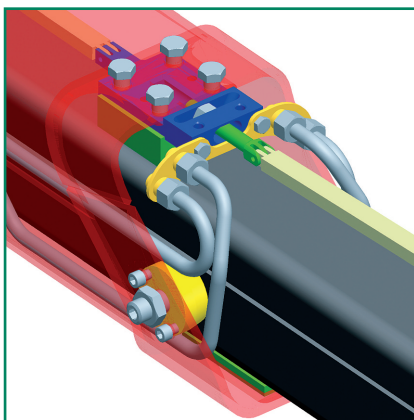

EPSCOPE

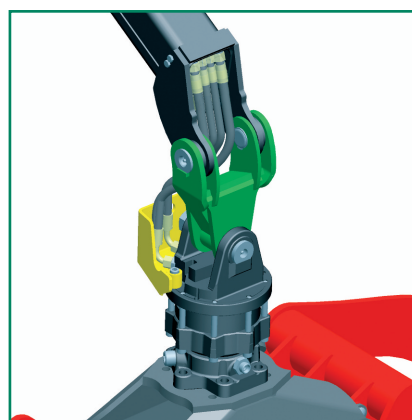

EPSLINK

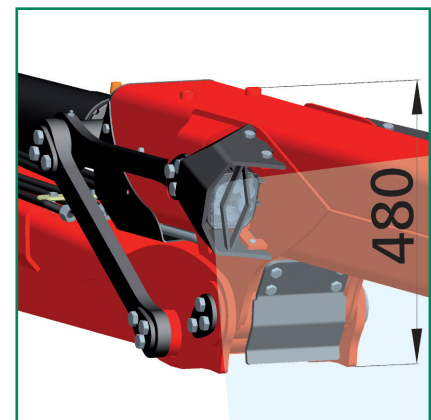

LED

EPSILON Kran GmbH

Christophorusstraße 30
A-5061 Elsbethen-Glasenbach
Tel.: +43 (0)662 629548-0
Fax: +43 (0)662 629548-3
E-Mail: office@epsilonkran.com

EPSILON PALFINGER

www.epsilonkran.com



PR018_GB
11/09